


# DC EV Charger

## 20kW/30kW

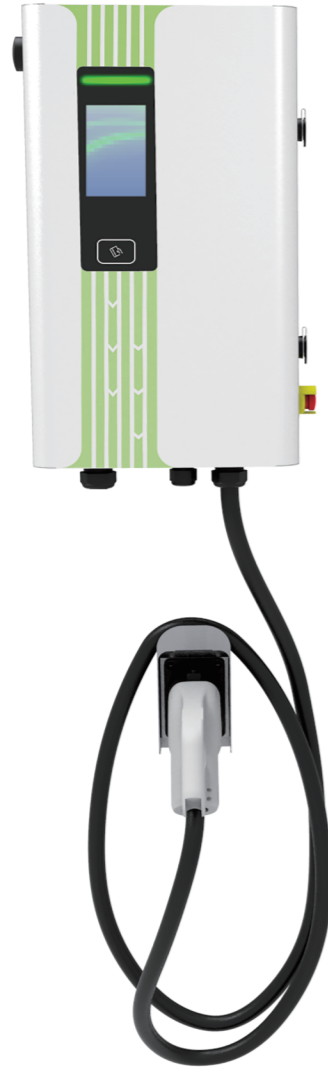

### Features

- Delicate appearance simple operation convenient installation
- High efficiency, reliable and stable performance
- Friendly interaction interface, 4.3-inch color touch screen (optional)
- Support GBT/CCS-2/CCS-1/CHAdeMO connector (or socket)(optional)
- Support RFID card/ocpp1.6J(optional)
- Support Plug Play
- Overload integrated Protection

## SPECIFICATION

Specification	Model	AE-D 20/30KW
AC Nominal Input	Phases/Lines	3-Phase+Neutral+PE
	Voltage	400V±10%
	Frequency	50/60Hz
AC Nominal Output	Voltage	200-1000V
	Current	0-50A/0-100A
	Power	20/30KW
	Power factor	≥0.99 (50%-100% load)
	Efficiency	≥95%
Configurations	Charging Outlet	CCS2
	Cable Length	5M
	LED Indicator	Yes
	LCD Screen	5" touchable screen for charging data
	Emergency Stop	Yes
	RFID Reader	Yes
	RFID Card	2pcs Mifare card
	Energy Meter	MID certified meter for optional
	RCD	Type A
	Network Module	WiFi/LAN/4G for options
	Communication Protocol	OCPP 1.6 Json
Environmental Index	Installation Method	Wall-mounted
	Operation Temperature	-30~+50°C
	Working Humidity	5-95% without condensation
	Working Altitude	2000M
	Protection Grade	IP54
	Application Site	Indoor/Outdoor
	Cooling Method	Forced air cooling
Security Protection	Multiple Protection	Over/Under voltage protection, Overload protection, Short circuit protection, Current leakage protection, Grounding protection, Surge protection, Over/Under temperature protection
	Safety Standard	IEC 61851-1, IEC 61851-23
	Warranty	2 years
Package Information	Product Dimension	209*340*620mm
	Package Dimension	400*459*750mm
	Net Weight	43KG
	Gross Weight	47KG